

1563353 chroom
1563691 mat zwart
1563771 mat geborsteld
1965009 mat goud
1964990 mat staal
2002012 mat koper




SPECIFICATIONS

1 Functions ABS Shower head

Flow Rate: 10.5L/Min At 3 Bar with flow restrictor
21L/Min At 3 Bar without flow restrictor

Dit product bevat het Belgaqua certificaat.
This product contains the Belgaqua certificate.


2D LINE DRAWING

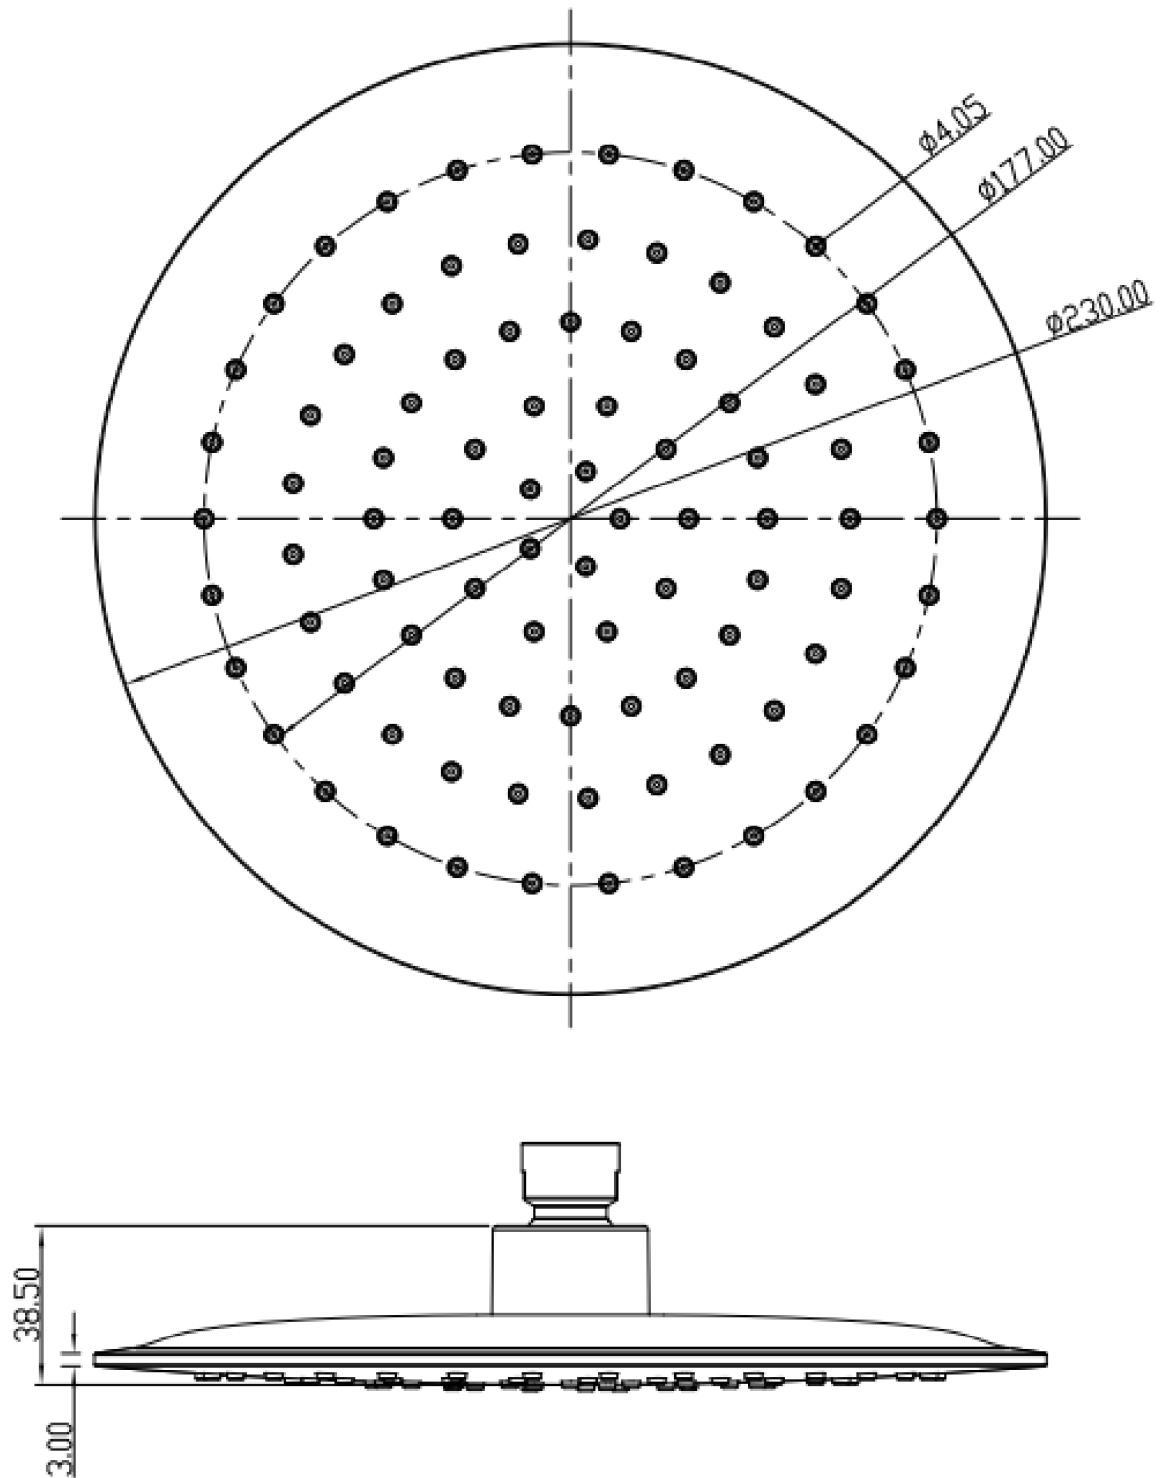

TECHNICAL DATA

Operating pressure	0.1-0.6 Mpa
	2.0-6.0 kgf/cm ²
	1.0-6.0 bar
Recommended operating pressure	0.2-0.5 Mpa
	2.0-5.0 kgf/cm ²
	2.0-5.0 bar
Cold water temperature	04 - 29 °C
Hot water temperature	55-65°C

FLOW RATE

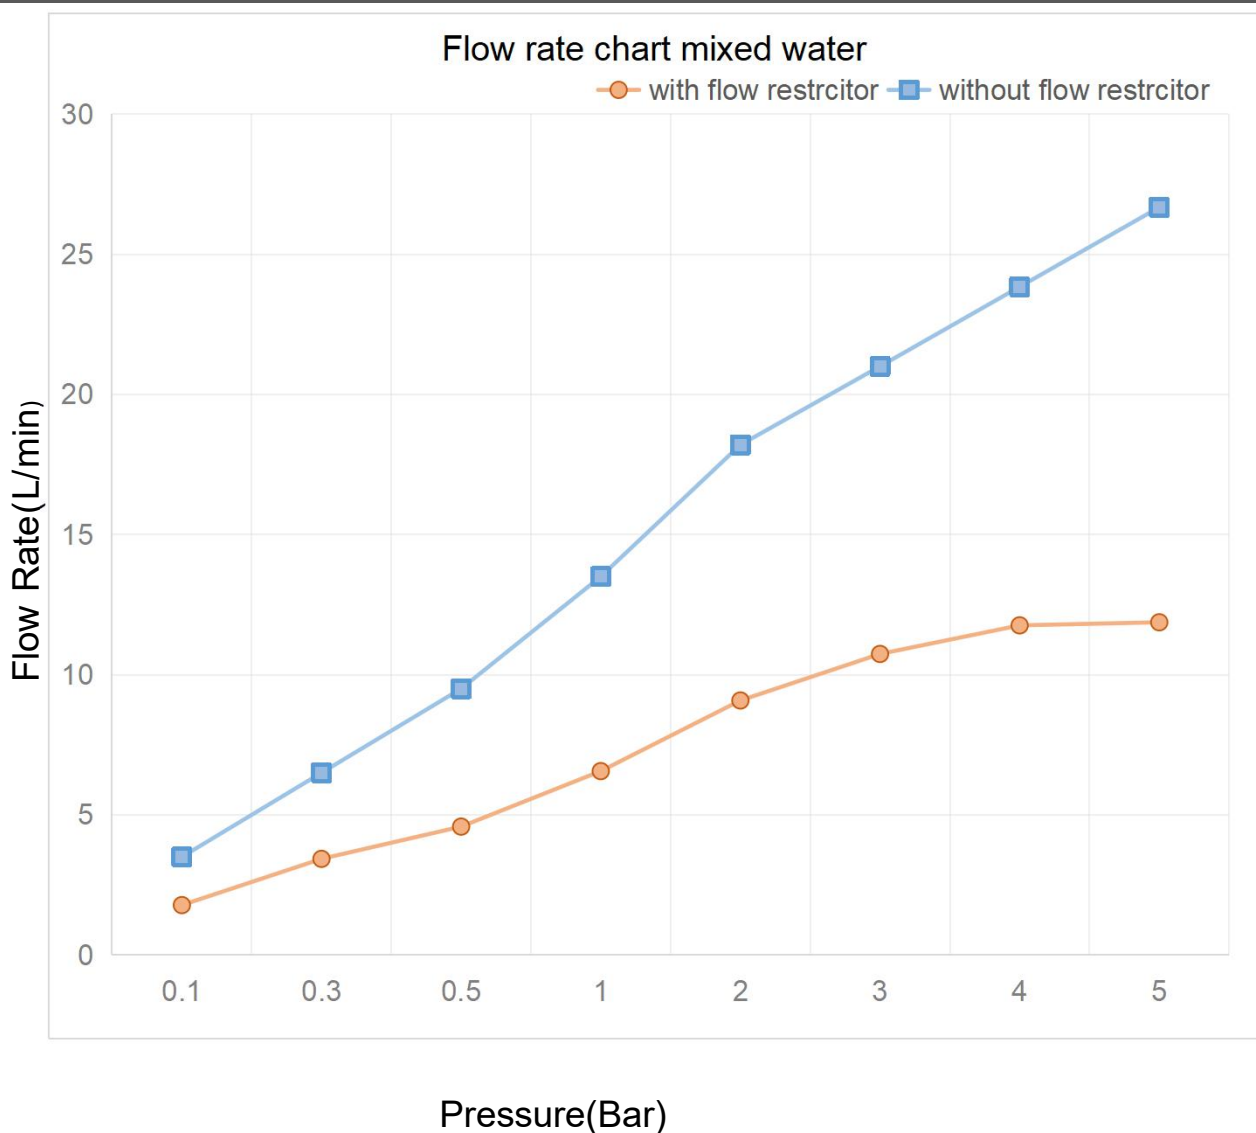

MAINTENANCE

- Clean the product with water or mild liquid detergent regularly, and wiped dry with soft cotton.
- Acid or abrasive detergents are prohibited.
- For additional cleaning advice scan the OR code.

